

# I/P Signal Converter for Standard Signals TEIP11-PS

Current 0...20 mA/4...20 mA,  
to air pressure 0.2...1 bar/3...15 psi

- **Reliable through well-proven concept**
  - More than 1,000,000 times in use
- **Compact design**
  - Small dimensions, low weight
- **Robust in terms of construction and function**
  - Influence of shock and vibration < 1 % at 10 g
- **Various signal ranges**
  - Input e.g. 0...20 mA or 4...20 mA
  - Output 0.2...1 bar or 3...15 psi
- **Complies with the following directives**
  - EMC directive 89/336/EEC as of May 1989
  - EC directive for the CE conformity certificate
- **Wide operating temperature range**
  - From -40 °C (optionally -55 °C) to +85 °C
- **Explosion protection certificates, for worldwide use**
  - ATEX, FM/CSA, GOST
  - Intrinsically safe or flameproof
- **Various models**
  - Control room housing, IP 20, for rail mounting
  - Control room housing, IP 20, for block mounting,
  - Plastic field housing, IP 54
  - Aluminium or stainless steel housing, IP 65
- **Single unit**
  - For OEM applications (on request)



## Construction and mode of operation

### The concept

The TEIP 11 signal converter is a link between electrical or electronic and pneumatic systems, converting electrical to pneumatic standard signals, e. g. 4...20 mA to 0.2...1 bar. Signal conversion is analog, using the patented force balancing principle.

The TEIP 11 signal converter's special features are its quite small dimensions, and its high functional stability even under shocks and vibrations. It can be exposed to up to 10 g without the functions being influenced by more than 1 %.

### The models

#### Control room housing for rail mounting

The control room housing unit for rail mounting is the simple low-cost model. It is mounted with a socket that fits on all conventional EN rails. The housing with a plastic cover has an IP 20 protection.

#### Control room housing for block mounting

The control room housing unit for block mounting is the space-saving version, allowing to arrange various converters very close to each other. Special features are the central air supply through a mounting block and the nonreturn valves in the air supply connections of the attached signal converters.

Up to 4 signal converters can be mounted to each of the mounting blocks needed for block mounting. If required, 2, 3, or 4 mounting blocks can be combined, such that blocks of 4-8-12-16 signal converters are formed. Due to the nonreturn valves individual signal converters can be added or removed while the system is running.


#### Field housing

The field housing unit is designed for mounting on site or in the field. Plastic housings (IP 54), aluminium housings (IP 65) and stainless steel housings (IP 65) are available. The units are suitable for both wall mounting and 2" pipe mounting.

A special version in a plastic housing can be supplied with inflammable gas instead of conventional compressed air.

The appropriate housing version can be selected from various models, according to the respective mounting conditions. Intrinsically safe and flameproof encapsulated devices for use in hazardous areas are also available. Various international explosion protection certificates allow for use throughout the world.

Several input and output signal ranges are possible for signal conversion (see specifications under section "Technical data"). Only compressed air of 1.4 bar is needed for supply.

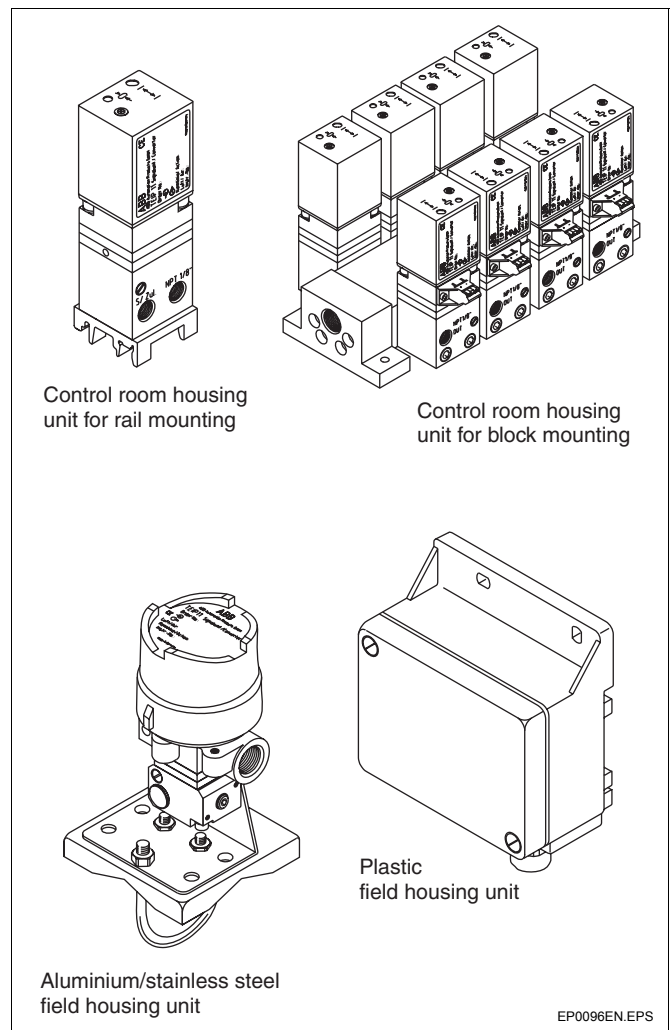

## Technical Data

### Input

#### Signal range

0...20 mA or 4...20 mA  
 0...10 mA or 10...20 mA or 4...12 mA or 12...20 mA  
 (other ranges on request)

#### Input resistance

$R_i = 260 \text{ ohms at } 20 \text{ }^\circ\text{C, } T_k + 0.4 \text{ } \%/K$

#### Overload limit

30 mA (refer to specifications under "Explosion protection" for devices with explosion protection approval)

#### Capacitance/Inductance

negligible

### Output

#### Signal range

0.2...1 bar or 3...15 psi  
 0.4...2 bar or 6...30 psi  
 (other ranges on request)

#### Air capacity (max.)

$\geq 5 \text{ kg/h} = 4.1 \text{ Nm}^3 / \text{h} = 2.4 \text{ scfm}$

#### Load characteristic to VDE/VDI 3520

$\geq 0.95 \text{ kg/h} = 0.9 \text{ Nm}^3 / \text{h} = 0.5 \text{ scfm}$

### Air supply

#### Instrument air

free of oil, water and dust to DIN/ISO 8573-1  
 pollution and oil contents according to Class 3  
 dew point 10 K below operating temperature

#### Supply pressure

$1.4 \pm 0.1 \text{ bar}$  or  $20 \pm 1.5 \text{ psi}$  (for output signal 1 bar or 15 psi)  
 $2.5 \pm 0.1 \text{ bar}$  or  $40 \pm 1.6 \text{ psi}$  (for output signal 2 bar or 30 psi)

#### Air consumption

$\leq 0.2 \text{ kg/h} = 0.16 \text{ Nm}^3 / \text{h} = 0.1 \text{ scfm}$

### Transmission data and influences

#### Characteristic

linear, direct or reverse action

#### Deviation

$\leq 0.5 \text{ } \%$

#### Hysteresis

$\leq 0.3 \text{ } \%$

#### Dead zone

$\leq 0.1 \text{ } \%$

#### Temperature

$\leq 0.5 \text{ } \%$  / 10 K between  $-20$  and  $+85 \text{ }^\circ\text{C}$   
 $\leq 2 \text{ } \%$  / 10 K between  $-55$  and  $-20 \text{ }^\circ\text{C}$

#### Air supply

$\leq 0.3 \text{ } \%$  / 0.1 bar pressure variation

#### Mechanical vibration

$\leq 1 \text{ } \%$  up to 10 g and 20...80 Hz

#### Seismic vibration

meets requirements to DIN IEC 68-3-3 class III for strong and strongest earthquakes

### Mounting orientation

$\leq 0.5 \text{ } \%$  at  $90^\circ$  change

### Step response

10...90 % and 90...10 % 0.6 sec  
 5...15 % and 15... 5 % 0.25 sec  
 45...55 % and 55...45 % 0.2 sec  
 85...95 % and 95...85 % 0.15 sec

### Complies with the following directives

EMC directive 89/336/EEC as of May 1989  
 EC directive for CE conformity certification

### Environmental capabilities

#### Climate class

GPF or FPF to DIN 40040  
 Temperature  $-40...+85 \text{ }^\circ\text{C}$  or  $-55...85 \text{ }^\circ\text{C}$   
 for operation, storage or transportation  
 Relative humidity 75 % average, 95 % short-time  
 non-condensing

### Explosion protection

#### ATEX, intrinsically safe (all models)

EEx ia IIC T4/T5/T6 (for control room housing and field housing units)

#### ATEX, flameproof (only for metal field housing units)

EEx d IIC T4/T5/T6

Observe the following limits for the temperature classes:

Temperature class	Max. short circuit current	Max. ambient temperature
T6	50 mA	60 °C
T6	60 mA	55 °C
T5	60 mA	70 °C
T5	100 mA	55 °C
T4	120 mA	45 °C
T4	60 mA	85 °C
T4	100 mA	85 °C
T4	120 mA	80 °C
T4	150 mA	70 °C

#### FM "intrinsically safe" (all models except for metal field housing units)

I.S.: CL I / Div 1 / Grp A B C D  
 N.I.: CL I / Div 2 / Grp A B C D

#### FM "intrinsically safe" (only for metal field housing units)

I.S.: CL I-II-III / Div 1 / Grp A B C D E F G  
 N.I.: CL I / Div 2 / Grp A B C  
 S.: CL II / Div 2 / Grp G  
 S.: CL III / Div 2

#### FM "explosion proof" (only for metal field housing units)

X.P.: CL I / Div 1 / Grp A B C D  
 D.I.P.: CL II III / Div 1 Grp E F G

#### CSA 2 "intrinsically safe" (all models except for metal field housing units)

I.S.: CL I / Div 1 / Grp A B C D  
 CL I / Div 2 / Grp A B C D

#### CSA "intrinsically safe" (only for metal field housing units)

I.S.: CL I / Div 1 / Grp A B C D  
 CL II / Div 1 / Grp E F G  
 CL III  
 CL I / Div 2 / Grp A B C D  
 CL II / Div 2 / Grp E F G

#### CSA "explosion proof" (only for metal field housing units)

X.P.: CL I / Div 1 / Grp B C D  
 CL II / Div 1 / Grp E F G

Other explosion protection approvals on request

### Control room housing unit

#### Material/protection

Aluminium housing, IP 20, with plastic cap

#### Mounting

Rail EN 50022 - 35 x 7.5  
EN 50035 - G 32  
EN 50045 - 15 x 5

#### Electrical connection

2-pole screw terminal for 2.5 mm<sup>2</sup>

#### Pneumatic connection

two 1/8 NPT threads for air supply and output

#### Mounting orientation

any

#### Weight

0.25 kg

#### Dimensions

see dimensional drawing

### Control room housing unit for block mounting

#### Material/protection

Aluminium housing, IP 20, with plastic cap

#### Mounting

blockwise, with special mounting blocks (accessory parts),  
max. 4 mounting blocks with 4 signal converters, each

#### Electrical connection

2-pole screw terminal for 2.5 mm<sup>2</sup>

#### Pneumatic connection

3/8 NPT thread for air supply  
(connected to central connection block)  
1/8 NPT for output  
(on each signal converter)

#### Mounting orientation:

any

#### Weight:

0.3 kg (each signal converter)

#### Dimensions:

see dimensional drawing

### Plastic field housing unit

#### Material/protection

Housing made of polyester, black, IP 54

#### Mounting

Wall mounting or 2"-pipe mounting  
(2"-pipe mounting only to vertical pipes)

#### Electrical connection

2-pole screw terminal for 2.5 mm<sup>2</sup> in housing,  
with PG 11 cable gland

#### Pneumatic connection

Two 1/8 NPT threads for air supply and output

#### Mounting orientation:

any

#### Weight:

1.0 kg

#### Dimensions:

see dimensional drawings

### Aluminium/stainless steel field housing unit

#### Material/protection

Aluminium or stainless steel housing, IP 65

#### Surface

Aluminium housing, varnished, two-component varnish  
Bottom part of housing varnished black, RAL 9005  
Cover light gray, RAL 9002  
Stainless steel housing  
Electropolished

#### Mounting

Wall mounting or 2" pipe mounting  
with separate stainless steel mounting bracket (accessory part)

#### Electrical connection

2-pole screw terminal for 2.5 mm<sup>2</sup> in housing  
with 1/2 NPT cable gland  
for "ATEX intrinsically safe"  
with M 20 x 1.5 threads  
for "ATEX EEx d"  
(on request cable gland with Ex d certificate as accessory part)  
with 1/2 NPT thread for FM/CSA

#### Pneumatic connection

two 1/4 NPT threads for air supply and output

#### Mounting orientation:

any

#### Weight:

0.62 kg with aluminium housing  
1.20 kg with stainless steel housing

#### Dimensions:

see dimensional drawings

### Accessories

#### EEx d cable gland

Made of brass, with M20 x 1.5 thread


#### Stainless steel mounting bracket for wall-mounting/ 2" pipe mounting

For aluminium or stainless steel field housing


#### Material for block mounting

Mounting block for 4 signal converters  
Panel with central 3/8 NPT air connection  
Dummy panel

**Dimensional drawings** Measurements in mm (inches)

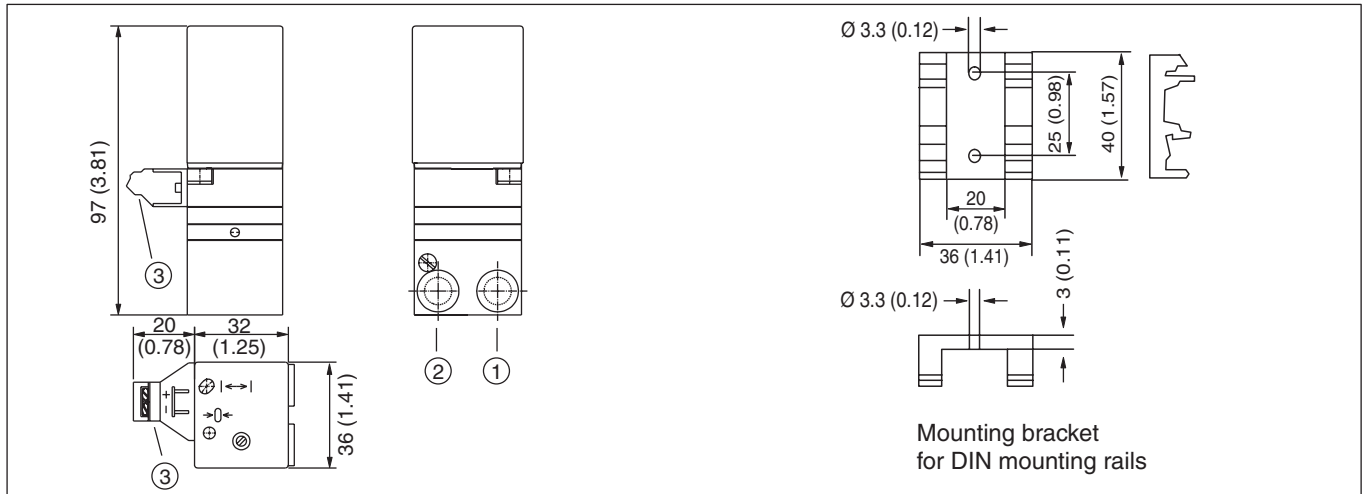


**Control room housing unit**

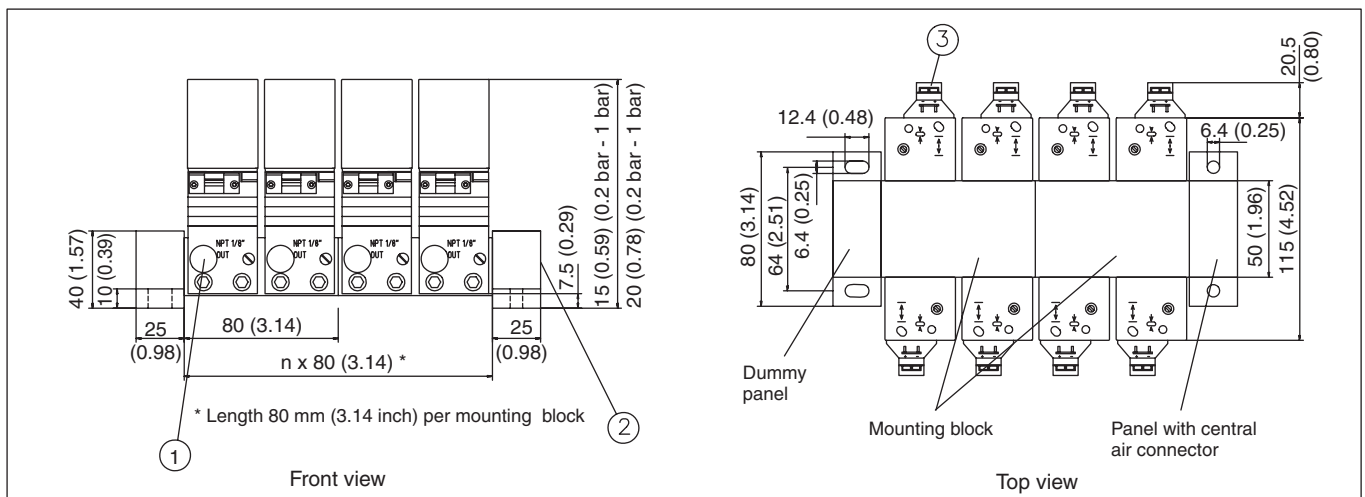


**Control room housing for block mounting**

EP0094EN.EPS

**Dimensional drawings** Measurements in mm (inches)

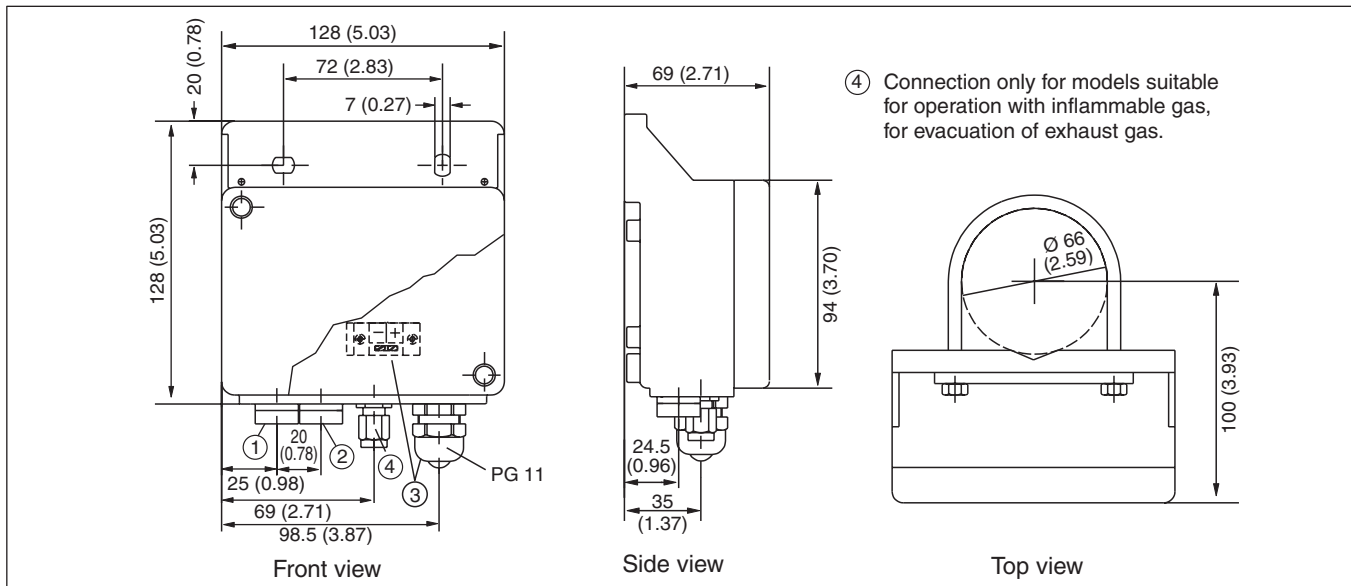

**Plastic field housing unit**

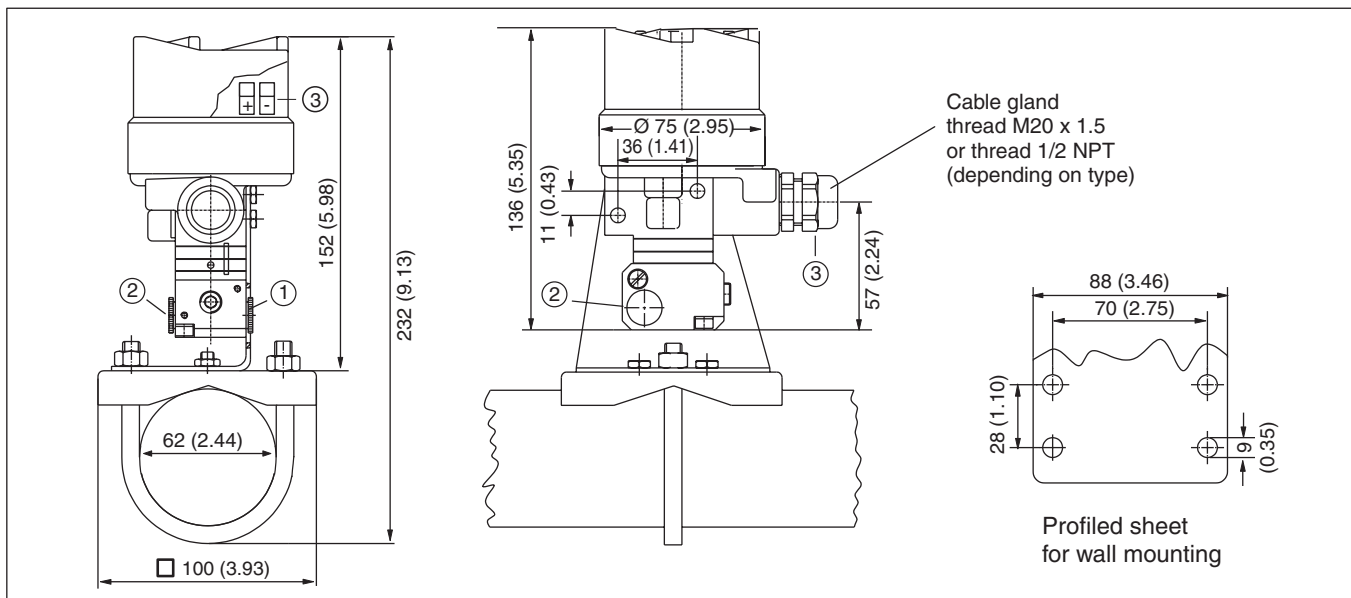

**Aluminium or stainless steel field housing unit**

EP0095EN.EPS

**Connections (all models):**

- ① Output
- ② Air supply
- ③ Electrical connections

**Ordering information**

I/P Converter		Variant digit No.	1-8	9	10	11	12	13	14	15	Code			
<b>TEIP11-PS</b>		Catalog No.	<b>V18311H-</b>						<b>0</b>					
<b>Explosion protection</b>														
without explosion protection				1										
ATEX EEx ia IIC				3										
ATEX EEx d IIC		1)		4										
FM/CSA "intrinsically safe"		2)		6										
FM/CSA "intrinsically safe" and "explosion proof"		1)		7										
<b>Design</b>														
Control room housing IP 20 for rail mounting				1										
Control room housing IP 20 for block mounting				A										
Field housing Polyester, IP 54				6										
Aluminium, IP 65				8										
Stainless steel, IP 65				9										
<b>Input signal</b>														
Input signal 0 ... 20 mA				1										
4 ... 20 mA				2										
Other input signal				0										
<b>Output signal</b>														
Output signal 0.2 ... 1 bar				1										
3 ... 15 psi				2										
Other output signal				0										
<b>Characteristic</b>														
Direct-action				1										
Reverse-action				2										
<b>Ambient temperature</b>														
-40 ... + 85 °C										1				
-55 ... + 85 °C										2				

<b>Additional ordering information</b>		Code			
<b>Certificate of compliance</b>					
Certificate of compliance with the order acc. to EN 10204-2.1 (DIN 50049-2.1)		CF1			
Certificate of compliance with the order acc. to EN 10204-2.1 (DIN 50049-2.1) with item description		CF2			
Test Report acc. to EN 10204-2.2 (DIN 50049-2.2)		CF3			
<b>Constructors test certificate</b>					
Constructors test certificate O acc.to DIN 55350-18-4.2.2		CH1			
Constructors test certificate M acc.to DIN 55350-18-4.2.2 with item description		CH3			
Constructors test certificate M acc.to DIN 55350-18-4.2.2 with item description and diagram		CH4			
<b>Inspection certificate</b>					
Inspection certificate 3.1B acc. to EN 10204 with max. deviation		CBA			
Inspection certificate 3.1B acc. to EN 10204 with add. data and item description		CBB			
<b>Test certificate</b>					
Test certificate & Letter of conformity with item description		CTC			
<b>Device identification label</b>					
includes lettering (plain text, max. 16 letters)					
stainless steel 18.5 x 65 mm		MK1			
sticker 11 x 25 mm		MK3			
<b>Operation with inflammable gas</b>					
					3)
<b>Input signal</b>					
4 ... 12 mA		503			
12...20 mA		504			
Other input signals on request					
<b>Output signal</b>					
0.4 ... 2 bar		508			
6 ... 30 psi		509			
Other output signals on request					

- 1) only with aluminium or stainless steel field housing
- 2) not with field housing
- 3) only for signal converter EEx ia IIC with polyester field housing

**Accessories**

TEIP11-PS	Catalog No.	Code			
Cable gland EEx d, brass, M 20x1.5 thread	319343				
Mounting bracket, stainless steel for wall mounting	319344				
for wall or 2" pipe mounting	319345				
(for mounting the aluminium or stainless steel field housing)					
Parts for block mounting					
Connection block for 4 converters	4) 7958243				
Termination block with central supply air connection 3/8 NPT	7958251				
Termination block without connection	7958245				

Ex stock versions								
				Catalog No.	Code			
<b>I/P Converter TEIP11-PS</b>								
Control room housing IP 20 for rail mounting								
Explosion protection		Input	Output					
without		0 ... 20 mA	0.2 ... 1 bar	V18311H - 111101				
			3 ... 15 psi	V18311H - 1112101				
		4 ... 20 mA	0.2 ... 1 bar	V18311H - 1121101				
			3 ... 15 psi	V18311H - 1122101				
ATEX EEx ia IIC		0 ... 20 mA	0.2 ... 1 bar	V18311H - 3111101				
			3 ... 15 psi	V18311H - 3112101				
		4 ... 20 mA	0.2 ... 1 bar	V18311H - 3121101				
Field housing								
Explosion protection		Material	Input	Output				
without		Polyester	4 ... 20 mA	0.2 ... 1 bar	V18311H - 1621101			
				3 ... 15 psi	V18311H - 1622101			
		Aluminium	4 ... 20 mA	0.2 ... 1 bar	V18311H - 1821101			
				3 ... 15 psi	V18311H - 1822101			
ATEX EEx ia IIC		Polyester	4 ... 20 mA	0.2 ... 1 bar	V18311H - 3621101			
				3 ... 15 psi	V18311H - 3622101			
		Aluminium	4 ... 20 mA	0.2 ... 1 bar	V18311H - 3821101			
				3 ... 15 psi	V18311H - 3822101			
ATEX EEx d IIC		Stainless steel	4 ... 20 mA	0.2 ... 1 bar	V18311H - 3921101			
		Aluminium	4 ... 20 mA	0.2 ... 1 bar	V18311H - 4821101			
				3 ... 15 psi	V18311H - 4822101			
		Stainless steel	4 ... 20 mA	0.2 ... 1 bar	V18311H - 4921101			

4) up to 4 connection blocks can be fitted together to block units carrying 4-8-12-16 converters

ABB has Sales & Customer Support expertise in over 100 countries worldwide..

[www.abb.com/instrumentation](http://www.abb.com/instrumentation)

The Company's policy is one of continuous product improvement and the right is reserved to modify the information contained herein without notice.

Printed in the Fed. Rep. of Germany (08.2006)

© ABB 2006



**ABB Limited**  
 Salterbeck Trading Estate  
 Workington, Cumbria  
 CA14 5DS  
 UK  
 Tel: +44 (0)1946 830 611  
 Fax: +44 (0)1946 832 661

**ABB Inc.**  
 125 E. County Line Road  
 Warminster, PA 18974  
 USA  
 Tel: +1 215 674 6000  
 Fax: +1 215 674 7183

**ABB Automation Products GmbH**  
 Schillerstr. 72  
 32425 Minden  
 Germany  
 Tel: +49 551 905-534  
 Fax: +49 551 905-555  
 CCC-support.deapr@de.abb.com